

# A Novel Dynamic Fusion Approach Using Information Entropy for Interval-Valued Ordered Datasets

Weihua Xu, Yanzhou Pan, Xiuwei Chen, Weiping Ding, and Yuhua Qian

**Abstract**—Information fusion is capable of fusing and transforming information originated from multiple sources into an integrated representation. As an important representative of information, interval-valued ordered data aims at characterizing inaccurate and ambiguous information. However, existing methods are inappropriate when applied to the multi-source fusion for them. In addition, it is inevitable that in daily-life the sources and attributes of multi-source information systems may update at the same time. Hence there is a need to fuse data as efficiently as possible. Inspired by these deficiencies, we pay attention to the effective and efficient fusion of multi-source interval-valued ordered data in varieties of cases. First, the concepts of fuzzy dominance relation and dominance classes based on it are put forward between any two samples of interval-valued ordered information systems. Second, we define the fuzzy dominating and dominated conditional entropy. Then the fusion model is established and it is multi-source interval-valued ordered data oriented. Furthermore, it is true that there are numerous real-life applications related to concurrent change of both sources and attributes. Consequently, we design four incremental mechanisms and algorithms for fusing multi-source interval-valued data on the ground of the static condition. Eventually, a series of experiments is carried out on twelve datasets to verify that the proposed fusion approach outperforms other comparative methods on efficacy. Meanwhile, our incremental fusion algorithms are efficient compared with the static one for updating multi-source interval-valued data when sources and attributes are in the simultaneous variation.

**Index Terms**—Dynamic fusion; Information entropy; Interval-valued ordered data; Multi-source information system

## I. INTRODUCTION

INTERVAL-VALUED data can be employed to effectively characterize uncertainty phenomena widely existing in human society, such as the fluctuation of stock price [1], the range of physical indicators [2] and the variation in temperature [3]. Oceans of researches about interval-valued data have been investigated on decision analysis [4], cluster [3], and data mining [5]. What's more, Dai et al. investigated uncertainty measures for incomplete interval-valued information systems via defining an  $\alpha$ -weak similarity relation [6]. In multi-criteria decision systems, a preference-ordered relation is provided for interval-valued objects based on prior knowledge of decision-makers, which are called interval-valued ordered decision systems [7]. For interval-valued ordered data, massive studies have been conducted regarding rough approximations using incremental methods [8], [9] and feature selection [10],

[11]. The aforementioned researches all concentrate on a single information system. However, with the fast advancement of big data technologies, aggregating and analyzing data from numerous sources or sensors may significantly upgrade the efficacy of decision-making. For instance, we may gather weather data from varieties of sensors to increase the precision of weather forecasting. And the existing methods on multi-source information fusion, such as [12], [13], [14], are unsuitable for the interval ordered data. Thus, it is necessary to promote the approach for using multi-source interval-valued ordered data to enhance data mining effectiveness.

As a useful method to deal with multi-source data, information fusion can transform and fuse information collected from multiple sources to compose an integrated representation. Two effective tools are often used in information fusion theories, i.e., rough set theory (RST) [15] and information entropy. For one thing, RST approximates concept sets via the approximations operators, which can effectively quantify uncertainty [16], [17], remove redundant attributes [18], and extract rules [19]. There are also some extended researches on rough sets with soft sets such as [20], [21]. [22] provided a brand new perspective into rough set theory from the angle of  $\mathcal{N}$ -soft sets. And based on RST, plenty of scholars have come up with developed models on information fusion [23], [24], [25]. [26] offered a general overview of information fusion based on RST in five respects, i.e., objects, attributes, rough approximations, attribute reduction and decision making. For example, Greco et al. put forward dominance rough sets for ordered data to show the preference relation among data [27]. However, this traditional approach only includes boolean relations, which are weak in quantitatively expressing the degree to which one object is superior to another. Then Hu et al. combined fuzzy set theory (FST) [28], used to evaluate the degree to which a sample belongs to a set, with RST and proposed fuzzy dominance rough set [29].

For another thing, information entropy was initially presented by Shannon as a mathematical instrument for uncertainty measurement and nowadays it has been widely used in information processing [30]. Massive entropy-based methods have been developed and applied into plenty of fields, such as [31] and [32]. Based on [28], the author defined fuzzy dominated and dominating conditional entropy in [33]. As information fusion research goes on, many information fusion methods involving RST and information entropy have been put forward. In fuzzy multi-source incomplete systems, Xu et al. used conditional entropy to determine the most essential sources for an attribute [34]. Later, for multi-label information systems, Qian et al. presented a novel fusion framework by utilizing information entropy [35].

However, the above techniques cannot be directly applied

W.H. Xu, Y.Z. Pan and X.W. Chen are with the College of Artificial Intelligence, Southwest University, Chongqing 400715, China(e-mail: chx-uw@ gmail.com; panyzhou98@163.com; xiuweichen1998@163.com).

W.P. Ding is with the School of Information Science and Technology, Nantong University, Nantong 226019, China(e-mail:dwp9988@163.com).

Y.H. Qian is with the Institute of Big Data Science and Industry, Shanxi University, Taiyuan 030006, Shanxi, China(jinchengqyh@126.com)

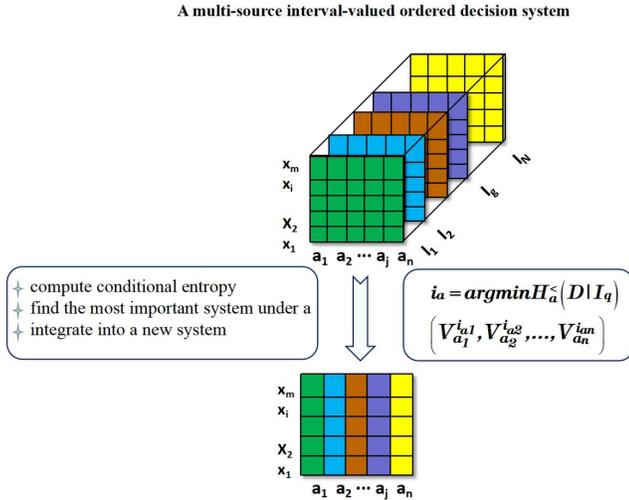


Fig. 1: The fusion process of the proposed method

to fuse interval-valued ordered data. And for more specific descriptions of dominance relations between samples, we introduce a fuzzy dominance conditional entropy for interval-valued data in multi-source fusion. Via utilizing a novel conditional entropy of interval-valued ordered data, this article presents an approach for multi-source fusion of interval-valued ordered decision systems (Ms-IVODS), which is shown in Fig1. First, we give the concept of the fuzzy dominance relation between two interval-valued ordered samples. Then, fuzzy dominating and dominated classes of each sample are defined. On that basis, fuzzy dominating and dominated conditional entropy can be calculated. For an attribute, the smaller the conditional entropy is, the more significant the system can be. That means we need to compute the conditional entropy respectively under different systems for each attribute, and try to seek out the most important system for the attribute. Finally, we integrate the attribute values in those systems to a new system as the fusion result.

Another incentive of the paper is to better adapt to the era of big data. Undoubtedly, it is time-consuming for dynamic data to employ static methods. In order to efficiently deal with updating data, numerous researchers have explored such as [36], [37]. In [38], the authors depicted the future direction of multi-source information fusion and incremental learning still showed great potentiality. Nowadays, numerous incremental updating methods, related to the dynamic variation of objects [39], attributes [40] or object sets [41], have been developed in the context of a single information system. These methods are all primarily used to access dynamic single-source data. As a generalization of single source data, multi-source data can contain more information. Consequently it is meaningful and necessary to explore how to fuse dynamic multi-source data. However, existing researches, for instance, [42], [43], [44] just have kept an eye on the static multi-source

environment, without considering the variation of information systems. There is no denying that static fusion methods will spend much more time acquiring the updated fusion results for dynamic data. In order to speed up the access time, many dynamic fusion approaches have been put forward with the change of information. Huang et al. developed a method for fusing interval-valued data dynamically as the number of information sources changes continually [45]. Zhu et al. proposed an approach for progressive fusion of fuzzy and uncertain data [46].

The above researches just paid attention to one single variant, while our study concentrates on the dynamic multi-source interval-valued ordered data whose sources and attributes change in the meantime. In real life, the number of sources and attributes may change at the same time. For instance, when predicting weather condition of a city, we can gather various information such as temperature, humidity, and wind speed from weather sensors all over the city. However, with the improvement of the science and technology, wind speed is found to be unimportant for weather forecast, so the data concerning wind speed will not be collected in order to save acquisition cost of information. At the same time, obsolete weather sensors need to be removed so as not to affect the accuracy of prediction. In this case, the sources and attributes change simultaneously, which means it is necessary to study dynamic fusion approaches of Ms-IVODS under this condition. There is no doubt that many single-updating fusion approaches in existence, such as [45] and [46] are not suitable for fusing Ms-IVODS when information sources and attributes change together. In this paper, four dynamic fusion methods are presented based on four cases, which are shown in Fig 2.

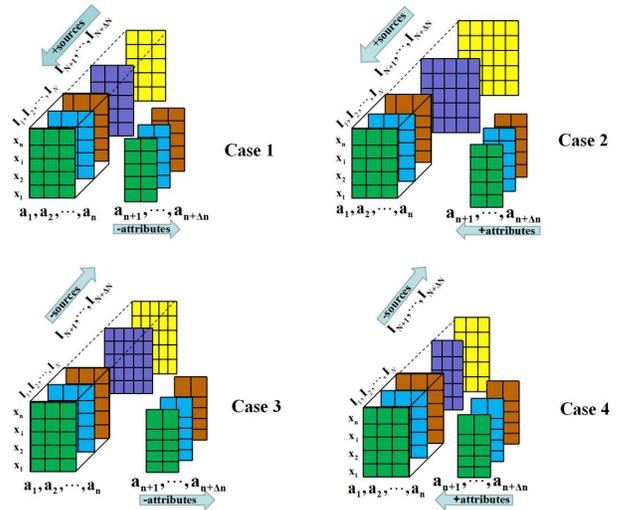


Fig. 2: Four changing cases of Ms-IVODS

The contributions are summarized as follows: 1) We establish a fuzzy dominance relation for any two interval-valued ordered data. Furthermore, a novel conditional entropy is proposed to quantify the significance of sources to attributes based on this relationship.

2) This paper presents an entropy-based framework for fusion of multi-source interval-valued ordered data. For each

attribute, we separately compute conditional entropy in each system and find out the system with the minimum outcome. Then in accordance with different attributes, we integrate all the corresponding values of the attribute into a new system as the fusion result. On the ground of the static method, four dynamic updating mechanisms are developed with the variation of sources and attributes.

3) Experiments on twelve datasets from UCI are used to verify that the proposed algorithms contribute to upgrade the performance of fusion, which reflects on the classification accuracy. Additionally, it is illustrated that the incremental mechanisms are conducive to significantly reduce calculation time when both sources and attributes change concurrently.

From the above, much effort has been dedicated to obtaining a unified representation of multi-source interval-valued ordered data and updating the fusion results quickly. Nevertheless, the improved algorithms still suffer from the following deficiencies and challenges.

1) The entropy-based fusion algorithm needs to compute the conditional entropy of each attribute under every information system, and its time complexity can be calculated through  $O(n \times |AT| \times |U|^2 + |AT|)$ . However, the time complexity of the state-of-the-art fusion approach [41] can be required through  $O(|U| \times |AT| \times (2n^2 + n \log_2(n) + 4n))$ . When there are just fewer sources, the computation time of our method is larger instead.

2) The presented approaches can speed up access time when sources and attributes change at the same time. Nevertheless, it is common that the sources, attributes, and samples are always in the simultaneous variation, with which our methods are less-suitable to cope.

3) There is still room for improvement in practical applications. For instance, [47] enlightens us whether we can apply the the proposed dynamic fusion approach to linguistic terms with weakened hedges. We will further explore it in the future work.

The remainder of this paper is arranged as follows. In Section II, several fundamental concepts are introduced. Section III puts forward a static fusion approach on the basis of conditional entropy for Ms-IVODS, furthermore, four dynamic techniques in Section IV. And grounded on them, we develop four incremental algorithms and compare the four mechanisms with the static one on time complexity in Section V. Section VI presents the results of the experimental analysis. Finally, Section VII draws the conclusion of this paper. And the brief framework of the paper can be seen in Fig3.

## II. PRELIMINARIES

This section introduces some basic concepts, i.e., ordered decision systems (ODS), fuzzy set, conditional entropy, and multi-source interval-valued ordered decision systems (Ms-IVODS).

### A. Ordered decision systems

We first introduce a basic concept called decision systems. Let  $IS = (U, AT, V_{AT}, f)$  be an information system [15], where  $U$  is the samples set;  $AT$  is the condition attributes

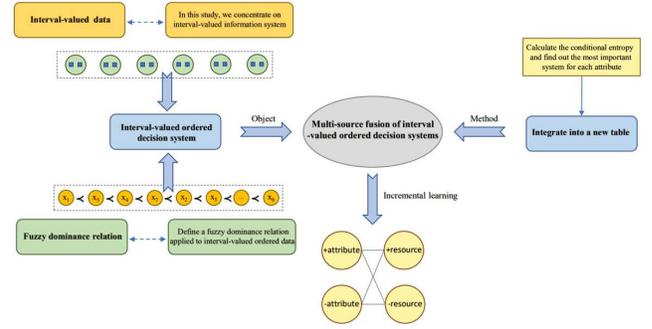


Fig. 3: The brief framework of the study

set;  $V_{AT}$  is the domain of  $AT$ ;  $f: U \times AT \rightarrow V$  is an information function. In particular, a decision system can be denoted as  $DS = IS \cup \{D, V_D, f_D\}$ , where  $D$  is the decision attribute set,  $V_D$  is the domain of  $D$  and  $f_D: U \times D \rightarrow V_D$  is an information function. For any  $B \subseteq AT$ , a relation  $R_B \subseteq U \times U$  can be defined. And for any  $x \in U$ , the relation class of  $x$  is defined as  $[x]^{R_B} = \{y \in U \mid xR_By\}$ . For any  $X \subseteq U$ , the lower and upper approximations of  $X$  are defined by

$$\begin{aligned} \underline{R}_B(X) &= \left\{ x \in U \mid [x]^{R_B} \subseteq X \right\}, \\ \overline{R}_B(X) &= \left\{ x \in U \mid [x]^{R_B} \cap X \neq \emptyset \right\}. \end{aligned}$$

Let  $U/D = \{Y_1, Y_2, \dots, Y_m\}$  be a partition of the universe  $U$  based on the decision attributes set  $D$ . For a DS, the approximation precision(AP) and approximation quality(AQ) under  $R_B$  are defined as [48], [49]:

$$\begin{aligned} AP_{R_B}(U/D) &= \frac{\sum_{i=1}^m |R_B(Y_i)|}{\sum_{i=1}^m |\overline{R}_B(Y_i)|}, \\ AQ_{R_B}(U/D) &= \frac{\sum_{i=1}^m |R_B(Y_i)|}{|U|}. \end{aligned}$$

And we are going to give a detailed introduction of AP and AQ in the experimental part. Now, we give the definition of ordered decision systems. A decision system can be called an ordered decision system (ODS) [50] if for any  $a \in AT$ ,  $V_a$  is completely pre-ordered by the relation  $\leq_a: x \leq_a y \Leftrightarrow f(x, a) \leq f(y, a)$ , which means  $y$  is at least as good as  $x$ , called an increasing preference or  $x \leq_a y \Leftrightarrow f(x, a) \geq f(y, a)$ , which means  $x$  is at least as good as  $y$ , called a decreasing preference.

### B. Fuzzy set theory

According to [29], a fuzzy set  $\tilde{X}$  on  $U$  can be denoted as  $\tilde{X} = \frac{\tilde{X}(x_1)}{x_1} + \frac{\tilde{X}(x_2)}{x_2} + \dots + \frac{\tilde{X}(x_n)}{x_n}$ , where  $\tilde{X} \in [0, 1]$  is the membership function. For any two fuzzy sets, we say  $\tilde{X} \subseteq \tilde{Y}$ , if  $\forall x \in U, \tilde{X}(x) \leq \tilde{Y}(x)$ . Furthermore, some basic operational rules are defined as [29]

$$\tilde{X} \cup \tilde{Y} = \frac{\max(\tilde{X}(x_1), \tilde{Y}(x_1))}{x_1} + \frac{\max(\tilde{X}(x_2), \tilde{Y}(x_2))}{x_2} + \dots +$$

$$\begin{aligned} \tilde{X} \cap \tilde{Y} &= \frac{\max(\tilde{X}(x_1), \tilde{Y}(x_n))}{x_n}, \\ \tilde{X}^c &= \frac{1-\tilde{X}(x_1)}{x_1} + \frac{1-\tilde{X}(x_2)}{x_2} + \dots + \frac{1-\tilde{X}(x_n)}{x_n}, \\ |\tilde{X}| &= \sum_{x \in U} \tilde{X}(x). \end{aligned}$$

### C. Multi-source interval-valued ordered decision systems

An interval-valued information system (IVIS) [4] can be denoted as  $IVIS = (U, AT, V\_AT, f)$ , where the information function  $f(x, a) = [f^L(x, a), f^U(x, a)]$  and for any  $a \in AT$ ,  $x \in U$ ,  $f^L(x, a)$  and  $f^U(x, a)$  denote the lower and upper endpoints of interval.

An IVIS is referred to as an interval-valued ordered information system (IVOIS) [7] if for any  $a \in AT$ ,  $V_a$  is completely pre-ordered by the relation  $\preceq_a : x \preceq_a y \Leftrightarrow f^L(x, a) \leq f^L(y, a) \wedge f^U(x, a) \leq f^U(y, a)$ , called an increasing preference or  $x \succeq_a y \Leftrightarrow f^L(x, a) \geq f^L(y, a) \wedge f^U(x, a) \geq f^U(y, a)$ , called a decreasing preference. Specially, an interval-valued ordered decision system (IVODS) can be denoted as  $IVODS = (U, AT_i, V\_AT_i, f_i, D, V\_D, f\_D)$ .

A multi-source interval-valued ordered information system (Ms-IVOIS) can be expressed as  $Ms - IVOIS = \{I_i | I_i = (U, AT_i, V\_AT_i, f_i), i = 1, 2, \dots, n\}$ , where  $I_i$  represents  $i$ -th IVOIS of Ms-IVOIS. Specially, a multi-source interval-valued ordered decision system (Ms-IVODS) can be denoted as  $Ms - IVODS = \{Ms - IVOIS \cup \{D, V\_D, f\_D\}\}$ .

*Example 1:* In this example, we are going to talk about a medical examination issue. 10 patients have thyroid examinations at four different hospitals. 6 relative checks are made for each patient and they are marked by  $a_1$  to  $a_6$ , which respectively stands for six corresponding indices: "FT3", "FT4", "TSH", "TPOAb", "TGAb", "TT3". Table I-IV are examination results performed at four hospitals. Meanwhile in each table,  $D$  represents conditions of patients and is divided into three categories, where 3 means hyperthyroidism, 2 indicates a sound condition and 1 implies hypothyroidism. And suppose  $V\_D = \{3, 1, 2, 1, 3, 2, 3, 3, 2, 1\}$ . The four information tables and  $D$  make up an  $Ms - IVODS = \{Ms - IVOIS \cup \{D, V\_D, f\_D\}\}$ , where  $Ms - IVOIS = \{I_i | I_i = (U, AT_i, V\_AT_i, f_i), i = 1, 2, 3, 4\}$ ,  $U = \{x_1, x_2, \dots, x_{10}\}$ , and  $AT_i = \{a_1, a_2, a_3, a_4, a_5, a_6\}$ .

## III. INFORMATION FUSION OF MS-IVODS WITH INFORMATION ENTROPY

Fusion of data from many sources can generate a complete and unified representation which is conducive to enhance

the efficacy of knowledge discovery. Additionally, information entropy is able to quantify the quantity of information and the significance of information sources. Then in this section we present a technique for MS-IVODS fusion based on information entropy.

*Definition 1:* Given an  $IVOIS = (U, AT, V\_AT, f)$ , where  $U = \{x_1, x_2, \dots, x_n\}$ ,  $\forall x, y \in U$  and for any  $a \in AT$ , the fuzzy dominance relation between  $x$  and  $y$  under  $a$  is defined as follow:

$$\widetilde{R}_a(x, y) = \frac{1}{1 + e^{-k(f^L(y, a) - f^L(x, a) + f^U(y, a) - f^U(x, a))}}, \quad (1)$$

where  $k$  is a positive integer.  $\widetilde{R}_a(x, y)$  reflects the fuzzy dominance relation between the objects  $x$  and  $y$  under the attribute  $a$ . What's more, it not only shows the fact that  $y$  is indeed superior to  $x$  but also evaluates the degree to which  $y$  is greater than  $x$ . Then the parameter  $k$  is introduced. The parameter  $k$ , a positive constant, is used to regulate the preference degree by users. In real-life situations,  $k$  is settled on the basis of users' preference. For any  $B \subseteq AT$ , we define  $\widetilde{R}_B(x, y) = \min_{b \in B} \widetilde{R}_b(x, y)$ , and the fuzzy dominating and dominated classes of  $x_i$  under  $B$  are defined as follow:

$$[x_i]_{\widetilde{R}_B}^> = \frac{\widetilde{R}_B(x_i, x_1)}{x_1} + \frac{\widetilde{R}_B(x_i, x_2)}{x_2} + \dots + \frac{\widetilde{R}_B(x_i, x_n)}{x_n}, \quad (2)$$

$$[x_i]_{\widetilde{R}_B}^< = \frac{\widetilde{R}_B(x_1, x_i)}{x_1} + \frac{\widetilde{R}_B(x_2, x_i)}{x_2} + \dots + \frac{\widetilde{R}_B(x_n, x_i)}{x_n}. \quad (3)$$

It should be noted that we set  $k$  to be 1 in this paper.

In the following, we will give the concept of entropy, which is used to assess the uncertainty in a decision system.

*Definition 2:* Given an  $Ms - IVODS = \{Ms - IVOIS \cup D, V\_D, f\_D\}$ . For any  $a \in AT$ , the fuzzy dominating and dominated conditional entropy of  $D$  are defined as follow:

$$H_a^>(D|I_q) = -\frac{1}{|U|} \sum_{i=1}^n \log \frac{|[x_i]_{\widetilde{R}_a}^> \cap [x_i]_{R_D}^>|}{|[x_i]_{\widetilde{R}_a}^>|}, \quad (4)$$

$$H_a^<(D|I_q) = -\frac{1}{|U|} \sum_{i=1}^n \log \frac{|[x_i]_{\widetilde{R}_a}^< \cap [x_i]_{R_D}^<|}{|[x_i]_{\widetilde{R}_a}^<|}, \quad (5)$$

where  $[x_i]_{R_D}^> = \frac{R_D(x_i, x_1)}{x_1} + \frac{R_D(x_i, x_2)}{x_2} + \dots + \frac{R_D(x_i, x_n)}{x_n}$ ,  $[x_i]_{R_D}^< = \frac{R_D(x_1, x_i)}{x_1} + \frac{R_D(x_2, x_i)}{x_2} + \dots + \frac{R_D(x_n, x_i)}{x_n}$ , and  $R_D(x, y) = \begin{cases} 1, & f_D(y, d) \geq f_D(x, d), \\ 0, & \text{otherwise.} \end{cases}$

From (1) of Proposition 1, we can find that,  $\forall x_i \in U$ , the closer  $\frac{|[x_i]_{\widetilde{R}_a}^< \cap [x_i]_{R_D}^<|}{|[x_i]_{\widetilde{R}_a}^<|}$  is to 1, the closer  $H_a^<(D|I_q)$  or  $H_a^>(D|I_q)$  is to 0, which means the less conflict between  $a$  and  $D$ . Thus, for the attribute  $a$ , the smaller the  $H_a^<(D|I_q)$  or  $H_a^>(D|I_q)$  is, the more important the  $I_q$  is.

TABLE I: Medical report in Hospital 1-  $I_1$

$U$	$a_1$	$a_2$	$a_3$	$a_4$	$a_5$	$a_6$
$x_1$	[0.90, 1.30]	[0.03, 0.06]	[1.10, 1.20]	[0.64, 1.00]	[0.40, 1.70]	[0.65, 0.85]
$x_2$	[0.83, 1.20]	[0.04, 0.10]	[1.20, 1.60]	[0.74, 1.10]	[0.75, 2.10]	[0.62, 0.82]
$x_3$	[0.76, 1.10]	0	[1.00, 1.10]	[1.10, 1.70]	[0.62, 0.79]	[0.73, 0.92]
$x_4$	[0.88, 1.20]	[0.02, 0.08]	[1.00, 1.10]	[0.56, 0.92]	[0.93, 2.40]	[0.62, 0.82]
$x_5$	[0.89, 1.20]	[0.04, 0.10]	[1.00, 2.80]	[0.76, 1.10]	[1.30, 2.60]	[0.41, 0.69]
$x_6$	[0.88, 1.90]	[0.06, 0.14]	[1.90, 2.80]	[0.75, 1.50]	[0.63, 0.82]	[0.26, 0.57]
$x_7$	[0.86, 1.80]	[0.04, 0.08]	[1.60, 2.50]	[0.78, 1.40]	[0.72, 0.91]	[0.28, 0.56]
$x_8$	[1.10, 2.10]	[0.09, 0.18]	[2.10, 2.90]	[0.95, 1.50]	[0.61, 0.79]	0
$x_9$	[0.83, 1.40]	[0.11, 0.20]	[2.10, 2.50]	[0.84, 1.40]	[0.66, 0.85]	[0.72, 0.82]
$x_{10}$	[0.99, 1.90]	[0.08, 0.16]	[1.60, 2.50]	0	[1.00, 2.40]	[0.37, 0.65]

TABLE II: Medical report in Hospital 2-  $I_2$

$U$	$a_1$	$a_2$	$a_3$	$a_4$	$a_5$	$a_6$
$x_1$	[1.10, 1.40]	[0.03, 0.07]	[1.10, 1.20]	[0.67, 1.10]	[0.43, 1.80]	[0.69, 0.90]
$x_2$	[1.00, 1.30]	[0.04, 0.11]	[1.20, 1.70]	[0.78, 1.20]	[0.79, 2.20]	[0.66, 0.86]
$x_3$	[0.94, 1.20]	0	[1.10, 1.20]	[1.20, 1.80]	[0.65, 0.83]	[0.77, 0.97]
$x_4$	[1.10, 1.30]	[0.02, 0.09]	[1.10, 1.20]	[0.60, 0.97]	[0.98, 2.50]	[0.65, 0.86]
$x_5$	[1.10, 1.30]	[0.04, 0.11]	[1.10, 2.90]	[0.80, 1.20]	[1.40, 2.80]	[0.43, 0.72]
$x_6$	[1.10, 2.10]	[0.06, 0.16]	[2.00, 2.90]	[0.79, 1.60]	[0.67, 0.86]	[0.27, 0.60]
$x_7$	[1.10, 1.90]	[0.04, 0.09]	[1.70, 2.60]	[0.83, 1.50]	[0.76, 0.96]	[0.29, 0.59]
$x_8$	[1.40, 2.30]	[0.10, 0.20]	[2.20, 3.10]	[1.00, 1.60]	[0.64, 0.83]	0
$x_9$	[1.00, 1.50]	[0.12, 0.22]	[2.20, 2.26]	[0.88, 1.50]	[0.70, 0.89]	[0.76, 0.86]
$x_{10}$	[1.20, 2.10]	[0.08, 0.18]	[1.70, 2.60]	0	[1.10, 2.50]	[0.39, 0.69]

TABLE III: Medical report in Hospital 3-  $I_3$

$U$	$a_1$	$a_2$	$a_3$	$a_4$	$a_5$	$a_6$
$x_1$	[0.95, 1.30]	[0.03, 0.07]	[1.00, 1.10]	[0.62, 0.98]	[0.39, 1.70]	[0.63, 0.83]
$x_2$	[0.88, 1.20]	[0.04, 0.10]	[1.10, 1.60]	[0.72, 1.10]	[0.73, 2.00]	[0.61, 0.80]
$x_3$	[0.81, 1.10]	0	[1.00, 1.10]	[1.10, 1.60]	[0.60, 0.77]	[0.71, 0.90]
$x_4$	[0.93, 1.20]	[0.02, 0.08]	[1.00, 1.11]	[0.55, 0.90]	[0.90, 2.40]	[0.60, 0.80]
$x_5$	[0.94, 1.30]	[0.04, 0.10]	[1.00, 2.70]	[0.74, 1.10]	[1.30, 2.60]	[0.40, 0.67]
$x_6$	[0.94, 2.00]	[0.06, 0.15]	[1.80, 2.70]	[0.73, 1.50]	[0.62, 0.80]	[0.25, 0.55]
$x_7$	[0.91, 1.80]	[0.04, 0.08]	[1.60, 2.40]	[0.76, 1.40]	[0.71, 0.89]	[0.27, 0.54]
$x_8$	[1.20, 2.20]	[0.09, 0.19]	[2.00, 2.80]	[0.93, 1.50]	[0.59, 0.77]	0
$x_9$	[0.88, 1.40]	[0.11, 0.20]	[2.00, 2.40]	[0.82, 1.40]	[0.64, 0.82]	[0.71, 0.80]
$x_{10}$	[1.00, 2.00]	[0.08, 0.17]	[1.60, 2.40]	0	[0.99, 2.30]	[0.36, 0.63]

*Proposition 1:* It is true that the fuzzy dominating and dominated conditional entropy satisfies

(1)  $H_a^<(D|I_q) \geq 0$ ,  $H_a^>(D|I_q) \geq 0$ .

(2)  $H_a^<(D|I_q) < \infty$ ,  $H_a^>(D|I_q) < \infty$ .

(3)  $H_a^<(D|I_q) \leq H_b^<(D|I_q)$  or  $H_a^<(D|I_q) \geq H_b^<(D|I_q)$ , if  $[x_i]_{\tilde{R}_a}^< \subseteq [x_i]_{\tilde{R}_b}^<$ .

(4)  $H_a^>(D|I_q) \leq H_b^>(D|I_q)$  or  $H_a^>(D|I_q) \geq H_b^>(D|I_q)$ , if  $[x_i]_{\tilde{R}_a}^> \subseteq [x_i]_{\tilde{R}_b}^>$ .

*Proof:* Take the fuzzy dominated conditional entropy as an example. (1) If  $\forall x_i \in U$ , there exists  $\frac{|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<|}{|[x_i]_{\tilde{R}_a}^<} = 1$ , then we can get  $H_a^<(D|I_q) = 0$ .

(2) If  $\exists x_i \in U$ ,  $|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<| = 0$ , then we can get  $H_a^>(D|I_q) = \infty$ . So we have  $H_a^<(D|I_q) < \infty$ .

(3) Given  $f(x, y) = -\log \frac{x}{x+y}$ , we have  $\frac{\partial f}{\partial x} = -\frac{y}{x(x+y)}$  and  $\frac{\partial f}{\partial y} = \frac{1}{x+y}$ . When  $x, y > 0$ , we can get  $\frac{\partial f}{\partial x} < 0$  and  $\frac{\partial f}{\partial y} > 0$ .

And we can get  $\forall x_i \in U$ ,  $[x_i]_{\tilde{R}_a}^< = \left( [x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^< \right) \cup \left( [x_i]_{\tilde{R}_a}^< \cap ([x_i]_{\tilde{R}_D}^<)^c \right)$ , so  $|[x_i]_{\tilde{R}_a}^<| = |[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<| + |[x_i]_{\tilde{R}_a}^< \cap ([x_i]_{\tilde{R}_D}^<)^c|$ . We can get  $-\log \frac{|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<|}{|[x_i]_{\tilde{R}_a}^<|} = -\log \frac{|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<|}{|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<| + |[x_i]_{\tilde{R}_a}^< \cap ([x_i]_{\tilde{R}_D}^<)^c|}$ . So if we have  $[x_i]_{\tilde{R}_a}^< \subseteq [x_i]_{\tilde{R}_b}^<$ , then  $|[x_i]_{\tilde{R}_a}^< \cap [x_i]_{\tilde{R}_D}^<| \leq |[x_i]_{\tilde{R}_b}^< \cap [x_i]_{\tilde{R}_D}^<|$  and  $|[x_i]_{\tilde{R}_a}^< \cap ([x_i]_{\tilde{R}_D}^<)^c| \leq |[x_i]_{\tilde{R}_b}^< \cap ([x_i]_{\tilde{R}_D}^<)^c|$ . Thus,  $H_a^<(D|I_q) \leq H_b^<(D|I_q)$  or  $H_a^<(D|I_q) \geq H_b^<(D|I_q)$  because  $\frac{\partial f}{\partial x} < 0$  and  $\frac{\partial f}{\partial y} > 0$  when  $x, y > 0$ .

(4) The process is similar to (3).

For simplicity and without loss of generality, in this paper we utilize the fuzzy dominated conditional entropy  $H_a^<(D|I_q)$  to select the most important source. Thus, we have the following Definition 3 which can be used to fuse Ms-IVODS.

*Definition 3:* Given an  $Ms - IVODS = \{Ms - IVOIS \cup D, V\_D, f\_D\}$ . The  $i_a$ -th system which is the most essential



TABLE VI: The result of fusion based on information entropy

$U$	$a_1$	$a_2$	$a_3$	$a_4$	$a_5$	$a_6$
$x_1$	[1.30, 1.40]	[0.03, 0.07]	[1.10, 1.20]	[0.67, 1.10]	[0.39, 1.70]	[0.63, 0.83]
$x_2$	[1.20, 1.30]	[0.04, 0.11]	[1.20, 1.60]	[0.78, 1.20]	[0.73, 2.00]	[0.61, 0.80]
$x_3$	[1.10, 1.20]	0	[1.00, 1.10]	[1.20, 1.80]	[0.60, 0.77]	[0.71, 0.90]
$x_4$	1.30	[0.02, 0.09]	[1.00, 1.10]	[0.60, 0.97]	[0.90, 2.40]	[0.60, 0.80]
$x_5$	[1.30, 1.40]	[0.04, 0.11]	[1.00, 2.80]	[0.80, 1.20]	[1.30, 2.60]	[0.40, 0.67]
$x_6$	[1.30, 2.10]	[0.06, 0.16]	[1.90, 2.80]	[0.79, 1.60]	[0.62, 0.80]	[0.25, 0.55]
$x_7$	[1.20, 2.00]	[0.05, 0.09]	[1.60, 2.50]	[0.83, 1.50]	[0.71, 0.89]	[0.27, 0.54]
$x_8$	[1.60, 2.30]	[0.10, 0.20]	[2.10, 2.90]	[1.00, 1.60]	[0.59, 0.77]	0
$x_9$	[1.20, 1.50]	[0.12, 0.22]	[2.10, 2.50]	[0.88, 1.50]	[0.64, 0.82]	[0.71, 0.80]
$x_{10}$	[1.40, 2.10]	[0.08, 0.18]	[1.60, 2.50]	0	[0.99, 2.30]	[0.36, 0.63]

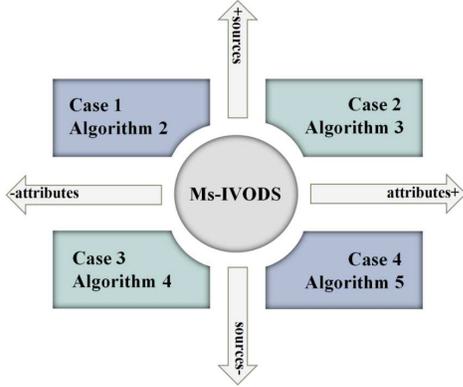


Fig. 4: The updating processes of the incremental methods

the static method, in this section, we design four dynamic mechanisms and their corresponding algorithms, which are intuitively presented in Fig2, Fig4 and Algorithms 2-5.

*Case 1:* Addition of information sources and deletion of conditional attributes

An incremental updating approach of Ms-IVODS is investigated in the context of adding sources and deleting attributes meanwhile. Suppose  $Ms - IVODS^t$  be the Ms-IVODS at time  $t$ ,  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$  be the inserted sources set, and  $\{a_{n+1}, \dots, a_{n+\Delta n}\}$  be the deleted attributes set at time  $t + 1$ . Then we have the following proposition.

*Proposition 1:* For  $\{a_1, a_2, \dots, a_n\}$ , the following properties are true:

1) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{a_i}^t$ ;

2) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof:* 1) If

$$\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

then we can get

$$\min_{q \in \{1, \dots, N+\Delta N\}} H_a^<(D|I_q) = \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

so the information source which is the most important for  $a$  is unchanged. Thus, we have  $V_{a_i}^{t+1} = V_{a_i}^t$ .

2) If

$$\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

then we can get that after  $\{I_{N+1}, \dots, I_{N+\Delta N}\}$  are inserted,

$$\min_{q \in \{1, \dots, N+\Delta N\}} H_a^<(D|I_q) = \min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q),$$

so the information source which is the most important for  $a$  turns to  $I_q$ , where  $q = \arg \min_{k \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_k)$ .

*Example 3:* (Continued from Example 2) Suppose that data from the latter two hospitals are supplementary and patients just carry out the first four medical examinations in there. That means in time  $t$ , the  $Ms - IVODS^t$  has two sources  $I_1$  and  $I_2$ , where the attributes are  $a_1 - a_6$ . The conditional entropy of all sources for each attribute are shown in TableVII. Then in time  $t + 1$ , two sources  $I_3$  and  $I_4$  are inserted into  $Ms - IVODS^t$ , and in the mean time,  $a_5$  and  $a_6$  are removed from the original attributes set. We compute the conditional entropy of all sources for each attribute at time  $t + 1$ , which are shown in TableVIII.

TABLE VII: The conditional entropy at time  $t$  in Case 1

	$IS_1$	$IS_2$
$a_1$	0.491235869	<b>0.488578995</b>
$a_2$	0.514888718	<b>0.514639546</b>
$a_3$	<b>0.421980985</b>	0.422557538
$a_4$	0.385685899	<b>0.377863609</b>
$a_5$	<b>0.616509219</b>	0.617479013
$a_6$	<b>0.560092555</b>	0.562254715

TABLE VIII: The conditional entropy at time  $t + 1$  in Case 1

	$IS_1$	$IS_2$	$IS_3$	$IS_4$
$a_1$	0.491235869	0.488578995	0.486389423	<b>0.485582234</b>
$a_2$	0.514888718	0.514639546	0.514689363	<b>0.51434019</b>
$a_3$	<b>0.421980985</b>	0.422557538	0.430053476	0.422649777
$a_4$	0.385685899	<b>0.377863609</b>	0.386801908	0.378310679

We can find that based on Proposition 1, we only need to compute  $H_{a_i}^<(D|I_j)$ , where  $i = 1, 2, 3, 4$  and  $j = 3, 4$ .

For  $i = 1, 2, 3, 4$ , the  $\min_{j \in \{1, 2\}} H_{a_i}^<(D|I_j)$  are the former information which do not need to recalculate it.

Then we propose an incremental algorithm grounded on increasing sources and decreasing attributes in Algorithm 2.

**Algorithm 2:** The incremental algorithm with the addition of sources and deletion of attributes

---

**Input** : Original fused results  
 $(V_{a_1}^t, V_{a_2}^t, \dots, V_{a_n}^t, V_{a_{n+1}}^t, \dots, V_{a_{n+\Delta n}}^t)$ ; Fuzzy dominated conditional entropy set  
 $\{H_{a_i}^<(D|I_j), i = 1, 2, \dots, n + \Delta n, j = 1, 2, \dots, N\}$ ;  
Deleted attribute set  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ ;  
Inserted source set  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$ ;

**Output** : An updated fusion table.

```

1 for  $q = N+1 : N + \Delta N$  do
2   for each  $a \in \{a_1, a_2, \dots, a_n\}$  do
3     compute  $H_a^<(D|I_q)$ 
4   end
5 end
6 for each  $a \in \{a_1, a_2, \dots, a_n\}$  do
7   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq$ 
       $\min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
8      $V_a^{t+1} = V_a^t$ 
9   end
10  if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) <$ 
       $\min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
11     $V_a^{t+1} = V_{I_q}(a), q =$ 
       $\arg \min_{k \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_k)$ 
12  end
13 end
return :  $(V_{a_1}^{t+1}, V_{a_2}^{t+1}, \dots, V_{a_n}^{t+1})$ .
```

---

*Case 2:* Addition of information sources and addition of conditional attributes

In this case, we discuss about simultaneous increase of both sources and attributes. Suppose  $Ms - IVODS^t$  be the Ms-IVODS at time  $t$ ,  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$  be the added sources set, and  $\{a_{n+1}, \dots, a_{n+\Delta n}\}$  be the added attributes set at time  $t + 1$ . Then we have the following propositions.

*Proposition 2:* For  $\{a_1, a_2, \dots, a_n\}$ , the following proposition are true:

- 1) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{a_i}^t$ ;
- 2) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof* : Proposition 2 is similar to Proposition 1, so the proof of it is similar to Proposition 1.

*Proposition 3:* For  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ , we have  $V_{a_i} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{1, \dots, N+\Delta N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof* : It is easy to demonstrate based on Definition 3.

*Example 4:* (Continued from Example 2) Suppose that 10 patients just make four medical tests in two hospitals. And

they need to have further examinations in there and retest in other two hospitals. Namely, in time  $t$ , the  $Ms - IVODS^t$  has two sources  $I_1$  and  $I_2$ , where the attributes are  $a_1 - a_4$ . The conditional entropy of all sources for each attribute are shown in Table IX.

TABLE IX: The conditional entropy at time  $t$  in Case 2

	$IS_1$	$IS_2$
$a_1$	0.491235869	<b>0.488578995</b>
$a_2$	0.514888718	<b>0.514639546</b>
$a_3$	<b>0.421980985</b>	0.422557538
$a_4$	0.385685899	<b>0.377863609</b>

Then in time  $t + 1$ , two sources  $I_3$  and  $I_4$  are inserted into  $Ms - IVODS^t$ , and in the mean time,  $a_5$  and  $a_6$  are inserted into the original attributes set. We compute the conditional entropy of all sources for each attribute at time  $t + 1$ , which are shown in Table X.

TABLE X: The conditional entropy at time  $t + 1$  in Case 2

	$IS_1$	$IS_2$	$IS_3$	$IS_4$
$a_1$	0.491235869	0.488578995	0.486389423	<b>0.485582234</b>
$a_2$	0.514888718	0.514639546	0.514689363	<b>0.51434019</b>
$a_3$	<b>0.421980985</b>	0.422557538	0.430053476	0.422649777
$a_4$	0.385685899	<b>0.377863609</b>	0.386801908	0.378310679
$a_5$	0.616509219	0.617479013	<b>0.61141654</b>	0.61666235
$a_6$	0.560092555	0.562254715	<b>0.559440095</b>	0.562678842

Similarly, we only need to compute  $H_{a_i}^<(D|I_j)$ , where  $i = 1, 2, 3, 4$  and  $j = 3, 4$  and  $H_{a_i}^<(D|I_j)$ , where  $i = 5, 6$  and  $j = 1, 2, 3, 4$ . For  $i = 1, 2, 3, 4$ , the  $\min_{j \in \{1, 2\}} H_{a_i}^<(D|I_j)$  are the former information which do not need to recalculate it.

And then, the correlative algorithm is put forward in Algorithm 3.

*Case 3:* Both deletion of information sources and conditional attributes In Case 3, we focus on the context of deleting sources and conditional attributes meanwhile. Suppose  $Ms - IVODS^t$  be the Ms-IVODS at time  $t$ ,  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$  be the deleted sources set, and  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  be the deleted attributes set at time  $t + 1$ . Then we have the following Proposition 4.

*Proposition 4:* For  $\{a_1, a_2, \dots, a_n\}$ , the following propositions are true:

- 1) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{a_i}^t$ ;
- 2) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{1, \dots, N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof* : 1) If

$$\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

---

**Algorithm 3:** The incremental algorithm with the addition of sources and addition of attributes

---

**Input** : Original fused results  $(V_{a_1}^t, V_{a_2}^t, \dots, V_{a_n}^t)$ ; Fuzzy dominated conditional entropy set  $\{H_{a_i}^<(D|I_j), i = 1, 2, \dots, n, j = 1, 2, \dots, N\}$ ; Inserted source set  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$ ; Inserted attribute set  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ ;

**Output** : An updated fusion table.

```

1 for  $q = N+1 : N + \Delta N$  do
2   for each  $a \in \{a_1, a_2, \dots, a_n, \dots, a_{n+\Delta n}\}$  do
3     compute  $H_a^<(D|I_q)$ 
4   end
5 end
6 for  $q = 1 : N$  do
7   for each  $a \in \{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  do
8     compute  $H_a^<(D|I_q)$ 
9   end
10 end
11 for each  $a \in \{a_1, a_2, \dots, a_n\}$  do
12   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
13      $V_a^{t+1} = V_a^t$ 
14   end
15   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
16      $V_a^{t+1} = V_{I_q}(a), q = \arg \min_{k \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_k)$ 
17   end
18 end
19 for each  $a \in \{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  do
20   compute  $i_a = \arg \min_{k \in \{1, 2, \dots, N+\Delta N\}} H_a^<(D|I_k)$ 
21   Let  $V_a = V_{I_{i_a}}(a)$ 
22 end
return :  $(V_{a_1}^{t+1}, V_{a_2}^{t+1}, \dots, V_{a_n}^{t+1}, V_{a_{n+1}}, \dots, V_{a_{n+\Delta n}})$ .
```

---

then we can get

$$\min_{q \in \{1, \dots, N+\Delta N\}} H_a^<(D|I_q) = \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

so the information source which is the most important for  $a$  is unchanged. Thus we have  $V_{a_i}^{t+1} = V_{a_i}^t$ .

2)If

$$\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q),$$

then we have

$$\min_{q \in \{1, \dots, N+\Delta N\}} H_a^<(D|I_q) = \min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q).$$

Thus after  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$  are removed, the information source which is the most important for  $a$  turns to  $I_q$ , where  $q = \arg \min_{k \in \{1, \dots, N\}} H_a^<(D|I_k)$ .

Based on Proposition 4, we can fast obtain the renewal of fusion results in Case 3.

*Example 5:* (Continued from Example 2) Suppose that although patients have complete medical tests, we just focus on results in the first four results from the first hospitals. That is to say in time  $t$ , the  $Ms - IVODS^t$  has four sources  $I_1 -$

$I_4$ , where the attributes are  $a_1 - a_6$ . The conditional entropy of all sources for each attribute are shown in TableX.

Then at time  $t+1$ ,  $I_3$  and  $I_4$  are deleted, and in the meantime,  $a_5$  and  $a_6$  are deleted. TableIX shows the conditional entropy of all sources for each attribute at time  $t+1$ .

Based on Proposition 4, for the remained attributes, we only need to utilize the former information  $\min_{q \in \{3, 4\}} H_a^<(D|I_q)$  and  $\min_{q \in \{1, 2\}} H_a^<(D|I_q)$  to update the fusion information table without any recalculation.

Then Algorithm 4 is designed.

---

**Algorithm 4:** The incremental algorithm with the deletion of sources and attributes.

---

**Input** : Original fused results  $(V_{a_1}^{t+1}, V_{a_2}^{t+1}, \dots, V_{a_n}^{t+1}, V_{a_{n+1}}, \dots, V_{a_{n+\Delta n}}^{t+1})$ ; Fuzzy dominated conditional entropy set  $\{H_{a_i}^<(D|I_j), i = 1, \dots, n+\Delta n, j = 1, \dots, N+\Delta N\}$ ; Deleted source set  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$ ; Deleted attribute set  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ ;

**Output** : An updated fusion table.

```

1 for each  $a \in \{a_1, a_2, \dots, a_n\}$  do
2   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
3      $V_a^{t+1} = V_a^t$ 
4   end
5   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
6      $V_a^{t+1} = V_{I_q}(a), q = \arg \min_{k \in \{1, 2, \dots, N\}} H_a^<(D|I_k)$ 
7   end
8 end
return :  $(V_{a_1}^{t+1}, V_{a_2}^{t+1}, \dots, V_{a_n}^{t+1})$ .
```

---

*Case 4:* Deletion of information sources and addition of conditional attributes In a similar way, this subsection talks about the situation of deleting sources and adding attributes in the meantime. Resume  $Ms - IVODS^t$  be the  $Ms - IVODS$  at time  $t$ ,  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$  be the deleted sources set and  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  be the added attributes set at time  $t+1$ . Then we have the following propositions.

*Proposition 5:* For  $\{a_1, a_2, \dots, a_n\}$ , the following propositions are true:

1)If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{a_i}^t$ ;

2) If  $\min_{q \in \{N+1, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, \dots, N\}} H_a^<(D|I_q)$ , then  $V_{a_i}^{t+1} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{1, \dots, N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof* : Proposition 5 is similar to Proposition 4, so the proof of it is similar to Proposition 4.

*Proposition 6:* For  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ , we have  $V_{a_i} = V_{I_q}(a_i)$ , where  $q = \arg \min_{k \in \{1, 2, \dots, N\}} H_a^<(D|I_k)$  and  $V_{I_q}(a_i)$  denotes the the value of  $a_i$  under  $I_q$ .

*Proof* : It is easy to confirm based on Definition 3.

*Example 6:* (Continued from Example 2) Suppose that 10 patients have already made four examinations in four hospitals but we only pay attention to the data from the first two hospitals and their corresponding six indices. That means in time  $t$ , the  $Ms-IVODS^t$  has four sources  $I_1- I_4$ , where the attributes are  $a_1-a_4$ . The conditional entropy of all sources for each attribute are shown in TableVIII.

Then in time  $t + 1$ , two sources  $I_3$  and  $I_4$  are removed and in the mean time,  $a_5$  and  $a_6$  are inserted. We compute the conditional entropy of all sources for each attribute at time  $t + 1$ , which are shown in TableVII.

Based on Proposition 5 and 6, we only need to compute  $H_{a_i}^<(D|I_j)$ , where  $i = 5, 6$  and  $j = 1, 2$ . For  $i = 1, 2, 3, 4$ , the  $\min_{j \in \{1,2\}} H_{a_i}^<(D|I_j)$  and  $\min_{j \in \{3,4\}} H_{a_i}^<(D|I_j)$  are the former information which do not need to recalculate it.

And on the basis of the above, we come up with relevant mechanism Algorithm 5.

**Algorithm 5:** The incremental algorithm with the deletion of sources and addition of attributes

---

**Input** : Original fused results  $(V_{a_1}^t, V_{a_2}^t, \dots, V_{a_n}^t)$ ; Fuzzy dominated conditional entropy set  $\{H_{a_i}^<(D|I_j), i = 1, \dots, n, j = 1, \dots, N + \Delta N\}$ ; Deleted source set  $\{I_{N+1}, I_{N+2}, \dots, I_{N+\Delta N}\}$ ; Inserted attribute set  $\{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$ ;

**Output** : An updated fusion table.

```

1 for  $q = 1 : N$  do
2   for each  $a \in \{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  do
3     compute  $H_a^<(D|I_q)$ 
4   end
5 end
6 for each  $a \in \{a_1, a_2, \dots, a_n\}$  do
7   if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) \geq \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
8      $V_a^{t+1} = V_a^t$ 
9   end
10  if  $\min_{q \in \{N+1, N+2, \dots, N+\Delta N\}} H_a^<(D|I_q) < \min_{q \in \{1, 2, \dots, N\}} H_a^<(D|I_q)$  then
11     $V_a^{t+1} = V_{I_q}(a), q = \arg \min_{k \in \{1, 2, \dots, N\}} H_a^<(D|I_k)$ 
12  end
13 end
14 for each  $a \in \{a_{n+1}, a_{n+2}, \dots, a_{n+\Delta n}\}$  do
15   compute  $i_a = \arg \min_{k \in \{1, 2, \dots, N\}} H_a^<(D|I_k)$ 
16   Let  $V_a = V_{I_{i_a}}(a)$ 
17 end
return :  $(V_{a_1}^{t+1}, V_{a_2}^{t+1}, \dots, V_{a_n}^{t+1}, V_{a_{n+1}}, \dots, V_{a_{n+\Delta n}})$ .
```

---

Further, the time complexity comparison are given respectively under the dynamic conditions and the static one in Table XI.

V. EXPERIMENTAL ANALYSIS

In this part, we evaluate the Ms-IVODS static fusion technique and relative incremental methods. Twelve datasets are downloaded from UCI, which are shown in TableXII. And all experiments are conducted on a private computer with an

i5-11300H processor, 16GB, and a Windows 11 operating system, using a Python 3.7 platform. Before starting the experiments, we employ the approach in [45] to produce multi-source interval-valued information systems. Then we generate 20 sources for each dataset. And it should be noted that for numerical attributes, the order relation is natural. While for categorical attributes, the preference relation is defined based on the semantics of the attributes.

TABLE XII: The description of data sets

No.	Data sets	Abbreviation	Samples	Attributes	Classes
1	Ionosphere	Iono	351	34	2
2	Auto MPG	AM	398	8	3
3	Hill-Valley	HV	606	101	2
4	Credit Approval	CA	690	16	2
5	Wine Quality-red	WQR	1599	12	6
6	Car Evaluation	CE	1728	7	4
7	Cardiotocography	Card	2126	22	10
8	Abalone	Abalone	4177	9	3
9	Wine Quality-white	WQW	4898	12	7
10	Page Blocks Classification	PB	5473	10	5
11	Shill Bidding	Bid	6321	13	2
12	Nursery	Nursery	12960	9	5

A. The analysis of fusion effectiveness

This subsection aims to verify the effectiveness of the proposed fusion method, which is denoted as CeF. And the verification is composed of two respects. For one thing, we compare CeF with three common fusion methods, including MeanF, MaxF and MinF via classification accuracy and corresponding P-values. And the three mechanisms are given below:

$$\begin{aligned}
 1) \text{Max}F_a(x) &= \left[ \min_{i \in \{1, 2, \dots, N\}} f_i^L(x, a), \max_{i \in \{1, 2, \dots, N\}} f_i^U(x, a) \right], \\
 2) \text{Min}F_a(x) &= \left[ \max_{i \in \{1, 2, \dots, N\}} f_i^L(x, a), \min_{i \in \{1, 2, \dots, N\}} f_i^U(x, a) \right], \\
 3) \text{Mean}F_a(x) &= \left[ \frac{1}{N} \sum_{i=1}^N f_i^L(x, a), \frac{1}{N} \sum_{i=1}^N f_i^U(x, a) \right].
 \end{aligned}$$

For another thing, we evaluate whether the performance of CeF on effectiveness has an advantage over HF, the state-of-art fusion method of multi-source interval-valued data designed in [45]. In addition to the above accuracy comparison, AP and AQ, as the indicators of precision and quality of approximation classification, are used to assess the benefits of CeF as well. And it is common knowledge that many existing classifiers cannot directly cope with interval-valued data. So in [50], the extended KNN and PNN classifiers are introduced to address interval-valued data. We can adjust the parameter k of the KNN classifier and  $\sigma$  of the PNN classifier to obtain the optimal classification result. The mean and standard deviation of classification accuracy are reported using a ten-fold cross-validation method. And the Wilcoxon signed-rank test is used to assess if the proposed approach outperforms HF statistically. Then corresponding P-values are got.

TABLE XI: The comparison of the time complexity between the static and dynamic algorithm

Cases	Static algorithm	Dynamic algorithm
1	$O((N + \Delta N) \times n \times  U ^2 + n)$	$O(\Delta N \times n \times  U ^2 + n)$
2	$O((N + \Delta N) \times (n + \Delta n) \times  U ^2 + n + \Delta n)$	$O((\Delta N \times (n + \Delta n) + N \times \Delta n) \times  U ^2 + n + \Delta n)$
3	$O(N \times n \times  U ^2 + n)$	$O(n)$
4	$O(N \times (n + \Delta n) \times  U ^2 + n + \Delta n)$	$O(N \times \Delta n \times  U ^2 + n + \Delta n)$

First, we give an overview of the comparison outcome of CeF and three common methods: MeanF, MaxF and MinF. The results are shown in Tables XIII and XIV. We can discover that in the KNN classifier, the proposed fusion method outperforms the other three common fusion methods in eleven datasets. In dataset Nursery, although slightly fewer than MaxF, CeF is still better than MeanF and MinF. In the PNN classifier, our method performs better than the others in nine datasets. For the other three datasets, the performance of CeF all ranks second. Additionally, as shown in Table XV, when setting a significance level of 10%, most of the P-values are smaller than 0.1, especially in PNN classifier. And that manifests the designed fusion mechanism CeF is statistically better than the other three common approaches in most situations.

Next, CeF and HF are compared on classification precision. Then the results are shown in Tables XVI and XVII. Table XVI indicates that no matter in KNN or in PNN, CeF always has a better performance in most datasets. That is to say the proposed method CeF can generate a fusion table with higher precision for most datasets regardless of the classifier. However, Table XVII reveals that our method is notably better than HF in PNN classifier. While in KNN case, CeF has no obvious advantage over the state-of-art fusion approach HF on classification accuracy.

Then, to demonstrate the benefits of our methods over the state-of-the-art fusion methodology HF, we compare the two fusion methods in terms of AP and AQ. AP and AQ can be used to effectively indicate the accuracy and quality of approximation classification. The greater the AP and AQ are, the more precise and high-quality the approximation classification is. We define a novel relation  $R_\alpha$  on  $U: R_\alpha = \left\{ (x, y) \in U \times U \mid \frac{dis(x, y)}{\max_{z \in U} \{dis(x, z)\}} \leq \alpha \right\}$ , where  $dis(x, y)$  denotes the distance between  $x$  and  $y$ . The distance function between any two interval-valued data is proposed in [51], and the distance between any two general trapezoidal fuzzy numbers is defined in [52].

We use the relation to calculate AP and AQ, where  $\alpha$  is defined to be between 0.05 and 0.5 with a 0.05 step. The AP and AQ of fusion results between CeF and HF are shown in Fig5 and Fig6. From the two figures, it is evident no matter what the value of  $\alpha$  is, AP and AQ of CeF are larger than HF. That is to say, CeF is always keeping its strengths and it has obvious advantage over the state-of-the-art fusion approach HF in approximation classification.

TABLE XIII: The classification accuracy of the fusion results of the four fusion methods

Datasets	KNN			
	MeanF	MaxF	MinF	CeF
Iono(k=15)	57.5±9.2	57.8±9.8	58.4±7.8	<b>59.2±8.0</b>
AM(k=6)	60.3±8.0	58.3±7.8	59.1±7.9	<b>62.3±8.5</b>
HV(k=17)	46.5±6.1	46.2±6.6	46.2±5.2	<b>47.7±4.7</b>
CA(k=17)	65.4±5.4	65.5±5.9	65.9±5.5	<b>68.4±6.1</b>
WQR(k=11)	41.5±3.3	42.0±4.0	41.3±3.8	<b>43.1±3.8</b>
CE(k=23)	69.5±3.9	69.6±3.6	69.7±3.8	<b>69.9±3.9</b>
Card(k=4)	35.6±1.3	34.9±2.0	36.8±1.8	<b>37.9±2.3</b>
Abalone(k=24)	34.6±1.1	36.2±2.1	35.0±1.4	<b>36.3±1.5</b>
WQW(k=43)	42.9±1.6	43.0±1.5	42.8±2.1	<b>43.8±2.4</b>
PB(k=2)	88.9±1.3	88.9±1.5	89.0±1.2	<b>89.1±1.0</b>
Bid(k=1)	80.9±1.8	80.8±1.7	80.9±1.8	<b>81.0±2.1</b>
Nursery(k=3)	52.3±1.6	<b>53.2±1.7</b>	50.9±1.4	52.4±1.2

TABLE XIV: The classification accuracy of the fusion results of the four fusion methods

Datasets	PNN			
	MeanF	MaxF	MinF	CeF
Iono( $\sigma=0.1$ )	57.8±6.5	57.8±8.4	59.5±5.8	<b>59.8±7.9</b>
AM( $\sigma=0.05$ )	47.2±8.9	47.7±8.0	<b>51.7±8.3</b>	51.3±6.5
HV( $\sigma=0.8$ )	52.5±3.7	52.3±3.3	<b>53.5±3.3</b>	53.3±3.4
CA( $\sigma=0.6$ )	60.6±6.4	57.8±4.9	64.2±7.6	<b>65.1±6.5</b>
WQR( $\sigma=0.1$ )	41.6±3.6	42.0±4.5	40.4±4.3	<b>42.3±4.4</b>
CE( $\sigma=0.2$ )	69.7±4.0	69.7±3.8	69.8±3.8	<b>70.0±3.9</b>
Card( $\sigma=0.1$ )	39.8±3.2	38.3±3.4	41.1±3.4	<b>42.4±3.2</b>
Abalone( $\sigma=0.05$ )	33.1±1.2	33.7±1.9	34.2±1.7	<b>34.7±2.0</b>
WQW( $\sigma=0.25$ )	44.8±2.0	44.9±2.1	44.2±1.8	<b>45.0±2.0</b>
PB( $\sigma=0.01$ )	82.0±1.5	82.4±1.5	82.1±1.3	<b>82.4±1.2</b>
Bid( $\sigma=0.2$ )	89.2±1.3	<b>89.2±1.3</b>	89.0±1.4	89.1±1.3
Nursery( $\sigma=0.5$ )	51.4±1.0	50.5±0.9	52.5±1.3	<b>54.5±1.5</b>

### B. The analysis of efficiency

In this subsection, designed to demonstrate the efficiency of incremental CeF, four modified approaches are compared with the static one in accordance with computation time and speed-up ratio. The update of dataset is simulated as follows. As for the variation of sources, when source increase, we regard the 50% data sources as the origin, and the number of sources is increased by 10% from the rest. When sources decrease, the whole dataset is considered the basic and is successively reduced by 10%. It is the same for the change of attributes, while we choose the variable ranges based on the attributes' number of each dataset.

As for computational time, the results are reported in Fig7-Fig10. And it is apparent that the fusion time of in-

TABLE XV: P-values of the comparison results in classification accuracy

Datasets	KNN			PNN		
	$H_1:CeF>MeanF$	$H_1:CeF>MinF$	$H_1:CeF>MaxF$	$H_1:CeF>MeanF$	$H_1:CeF>MinF$	$H_1:CeF>MaxF$
Iono	0.3349	0.2591	0.3357	0.5000	<b>0.0289</b>	0.1163
AM	0.1465	<b>0.0700</b>	<b>0.0615</b>	<b>0.0614</b>	0.5834	<b>0.0616</b>
HV	<b>0.0838</b>	<b>0.0145</b>	0.1867	<b>0.0700</b>	0.9772	<b>0.0526</b>
CA	<b>0.0103</b>	<b>0.0374</b>	<b>0.0028</b>	<b>0.0046</b>	0.1704	<b>0.0029</b>
WQR	<b>0.0765</b>	<b>0.0840</b>	<b>0.0860</b>	0.1201	<b>0.0328</b>	0.2491
CE	<b>0.0856</b>	0.2940	<b>0.0907</b>	<b>0.0445</b>	<b>0.0987</b>	<b>0.0131</b>
Card	<b>0.0083</b>	<b>0.0331</b>	<b>0.0046</b>	<b>0.0040</b>	<b>0.0122</b>	<b>0.0045</b>
Abalone	<b>0.0071</b>	<b>0.0332</b>	0.5203	<b>0.0377</b>	<b>0.0963</b>	0.1106
WQW	<b>0.0515</b>	<b>0.0416</b>	0.1309	<b>0.0482</b>	<b>0.0029</b>	0.2948
PB	0.2195	0.1158	0.2002	<b>0.0747</b>	0.5472	<b>0.0770</b>
Bidding	0.2766	0.2375	0.3834	0.6082	0.9693	<b>0.0502</b>
Nursery	<b>0.0040</b>	0.9839	0.5237	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>

TABLE XVI: The classification accuracy of the fusion results of HF and CeF

Datasets	KNN		Datasets	PNN	
	HF	CeF		HF	CeF
Iono(k=20)	55.0±8.3	<b>59.2±7.9</b>	Iono( $\sigma=0.5$ )	56.7±4.6	<b>63.3±7.3</b>
AM(k=6)	58.3±9.1	<b>62.3±8.5</b>	AM( $\sigma=0.5$ )	52.0±9.2	<b>62.6±7.2</b>
HV(k=17)	45.5±6.1	<b>47.7±4.7</b>	HV( $\sigma=0.8$ )	46.4±4.5	<b>53.3±3.4</b>
CA(k=3)	<b>65.8±3.1</b>	64.6±4.3	CA( $\sigma=0.1$ )	<b>63.6±2.9</b>	62.8±5.8
WQR(k=11)	42.3±3.0	<b>43.1±3.8</b>	WQR( $\sigma=0.1$ )	39.5±3.4	<b>42.3±4.4</b>
CE(k=23)	69.3±3.7	<b>69.9±3.9</b>	CE( $\sigma=0.2$ )	68.5±2.9	<b>70.0±3.9</b>
Card(k=4)	<b>39.6±2.7</b>	37.9±2.3	Card( $\sigma=0.1$ )	<b>44.7±2.7</b>	42.4±3.2
Abalone(k=24)	35.4±2.0	<b>36.3±1.5</b>	Abalone( $\sigma=0.05$ )	34.1±2.0	<b>34.7±2.0</b>
WQW(k=43)	43.2±1.5	<b>43.8±2.4</b>	WQW( $\sigma=0.25$ )	35.9±1.8	<b>45.0±2.0</b>
PB(k=2)	88.8±1.3	<b>89.1±1.0</b>	PB( $\sigma=0.2$ )	82.4±1.9	<b>89.7±1.3</b>
Bid(k=1)	80.7±1.4	<b>81.0±2.2</b>	Bid( $\sigma=0.2$ )	<b>89.3±1.3</b>	89.3±1.3
Nursery(k=1)	58.0±1.4	<b>58.3±1.7</b>	Nursery( $\sigma=0.2$ )	58.4±1.2	<b>59.8±1.4</b>

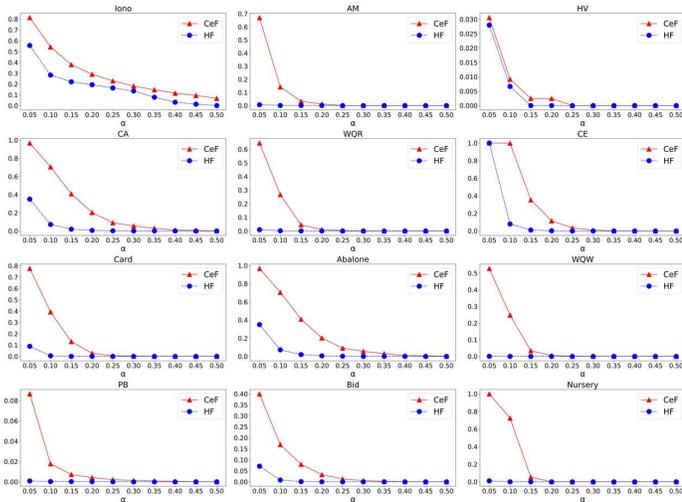


Fig. 5: AP of CeF and HF

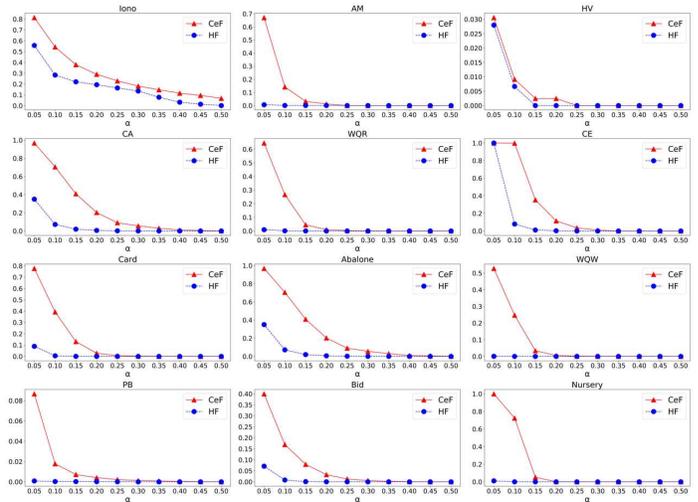


Fig. 6: AQ of CeF and HF

cremental methods is remarkably smaller than that of the static approach. On account of the application of previous knowledge, dynamic mechanisms are able to avoid repeating calculating and dramatically save computation time.

Subsequently, we discuss the efficiency demonstration from another aspect of speed-up ratio and the results are displayed in Fig11. The x-axis represents the process through which attributes and sources vary, where  $0 \rightarrow 4$  is the change

direction, Attributes number(-) and Sources number(-) denote deleting attributes and sources respectively, and Attributes number(+) and Sources number(+) denote adding attributes and sources. The y-axis stands for abbreviations of datasets, and the z-axis is the reflection of the speed-up ratio. From the results, we can get the dynamic updating approach yield speedup ranging from 5.5 to 11× over the static fusion approach in Case 1. And the ratios in Case 2-4 are 1.7-5.5×,

TABLE XVII: P-values of the comparison results in classification accuracy between CeF and HF

Datasets	KNN		Datasets	PNN	
	$H_1: CeF > HF$			$H_1: CeF > HF$	
Iono(k=20)	<b>0.0296</b>		Iono( $\sigma=0.5$ )	<b>0.0111</b>	
AM(k=6)	0.1298		AM( $\sigma=0.5$ )	<b>0.0082</b>	
HV(k=17)	0.1355		HV( $\sigma=0.8$ )	<b>0.0064</b>	
CA(k=3)	0.7032		CA( $\sigma=0.1$ )	0.7793	
WQR(k=11)	0.3050		WQR( $\sigma=0.1$ )	<b>0.0703</b>	
CE(k=23)	<b>0.0912</b>		CE( $\sigma=0.2$ )	<b>0.0696</b>	
Card(k=4)	0.9382		Card( $\sigma=0.1$ )	0.9971	
Abalone(k=24)	0.2701		Abalone( $\sigma=0.05$ )	0.2703	
WQW(k=43)	0.2703		WQW( $\sigma=0.25$ )	<b>0.0030</b>	
PB(k=2)	0.1106		PB( $\sigma=0.02$ )	<b>0.0029</b>	
Bid(k=1)	0.2067		Bid( $\sigma=0.2$ )	0.9772	
Nursery(k=1)	0.5236		Nursery( $\sigma=0.2$ )	<b>0.0205</b>	

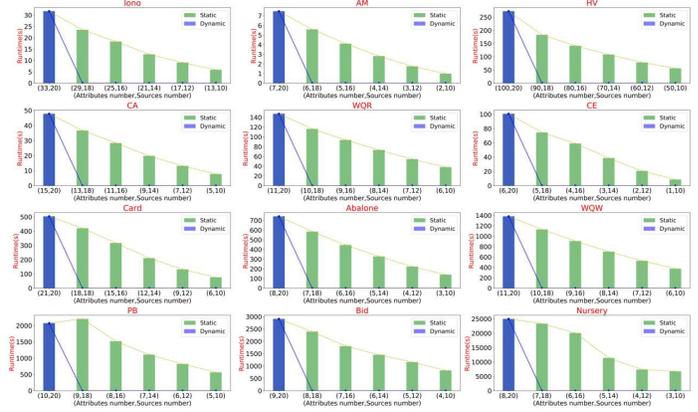


Fig. 9: Runtime time of case 3

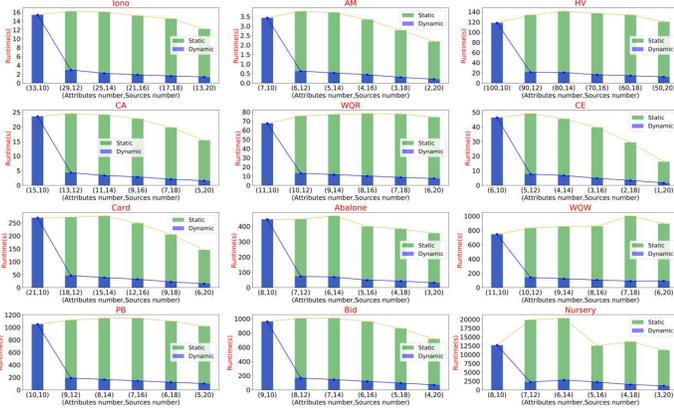


Fig. 7: Runtime time of case 1

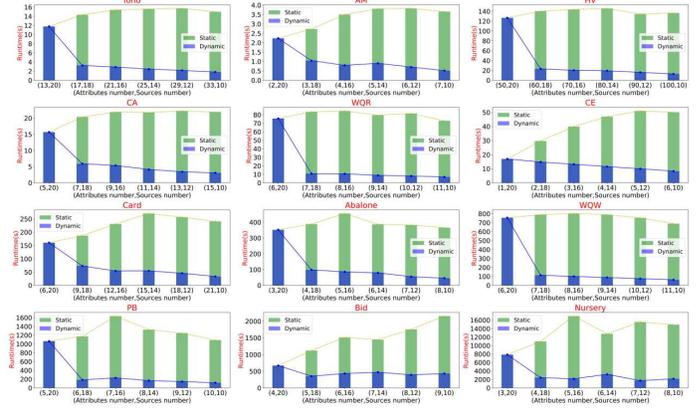


Fig. 10: Runtime time of case 4

63-598729 $\times$  and 2-11 $\times$  respectively. It should be noted the speed-up ratio of the dynamic updating approach for Case 3 is abnormally high since the static fusion approach needs  $N \times n$  calculations, where  $N$  denotes the number of remaining sources and  $n$  denotes the number of remaining attributes. However, in Case 3, the dynamic updating approach only needs to seek out the relative information rather than generate something new to update the fusion results, consequently, the improved efficiency of the dynamic updating approach for

Case 3 is very high. Furthermore, the Wilcoxon signed-rank test is utilized to demonstrate whether the dynamic algorithms can significantly reduce the runtime of fusion. The P-value of all tests are  $4.56 \times e^{-44}$ . Given a significance level of 10%, we can find that the result is statistically significant. In general, the four dynamic fusion mechanisms can markedly reduce the runtime of fusion.

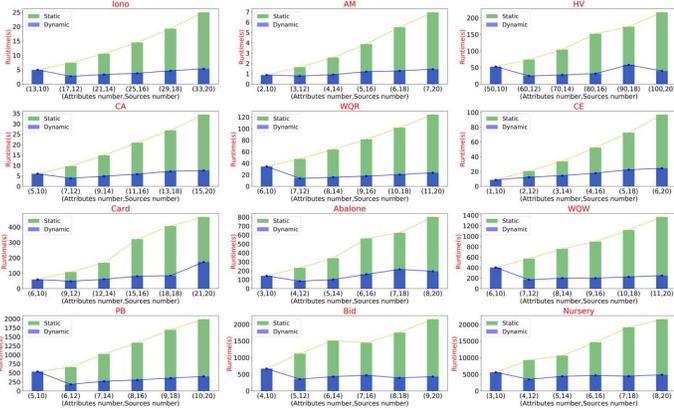


Fig. 8: Runtime time of case 2

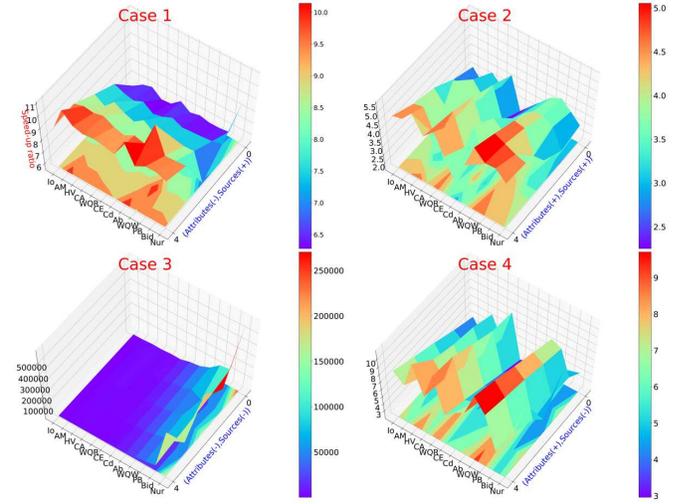


Fig. 11: The speed-up ratio of case 1-4

## VI. CONCLUSION AND FUTURE WORK

Interval-valued ordered data from several sources are ubiquitous in real-world applications, characterizing unpredictability of real-life situations. And that is the reason why it is vital to research multi-source interval-valued ordered data fusion. Through defining a fuzzy dominance relation and relative conditional entropy for interval-valued ordered data, this study presents a conditional entropy fusion strategy for MS-IVODS. In addition, the four incremental techniques of dynamic fusion are designed for simultaneously varying information sources and attributes. Then we compare the time complexity of four dynamic methods to the static fusion approach. Fig 4 shows the relationships of the whole five algorithms. Finally, twelve experiments demonstrate that the proposed fusion technique beats three conventional fusion approaches in terms of classification accuracy and exceeds the state-of-the-art fusion approach in terms of approximation classification. Moreover, the efficiency study indicates that these dynamic approaches updating fusion table can efficiently reduce the fusion process running time.

According to the deficiencies presented in the Introduction, there are two aspects for our future research. For one thing, we try to develop incremental mechanisms with the simultaneous changes of sources, attributes and objects. For another thing, we will attach greater importance to the practical applications such as the assessment of the treatment technologies in health care waste management.

## ACKNOWLEDGMENT

This paper is supported by the National Natural Science Foundation of China (No. 61976245, No. 61976120).

## REFERENCES

- [1] F. de A.T. de Carvalho, P. Bertrand, and E. C. Simões, "Batch SOM algorithms for interval-valued data with automatic weighting of the variables," *Neurocomputing*, vol. 182, pp. 66-81, 2016.
- [2] D. Guru, B. B. Kiranagi, and P. Nagabhushan, "Multivalued type proximity measure and concept of mutual similarity value useful for clustering symbolic patterns," *Pattern Recognit. Lett.*, vol. 25, no. 10, pp. 1203-1213, 2004.
- [3] P. Durso, and J. M. Leski, "Fuzzy c-ordered medoids clustering for interval-valued data," *Pattern Recognit.*, vol. 58, pp. 49-67, 2016.
- [4] Z. Y. Liu, F. Y. Xiao, C-T. Lin, B. H. Kang, and Z. H. Cao, "A generalized golden rule representative value for multiple-criteria decision analysis," *IEEE Trans. Syst. Man Cybern. Syst.*, vol. 51, no. 5, pp.3193-3204, 2019.
- [5] X. Y. Zhang, C. L. Mei, D.G. Chen, and J.H. Li, "Multi-confidence rule acquisition and confidence-preserved attribute reduction in interval-valued decision systems," *Int. J. Approx. Reason.*, vol. 55, no. 8, pp. 1787-1804, 2014.
- [6] J. H. Dai, B. J. Wei, X. H. Zhang, and Q. L. Zhang, "Uncertainty measurement for incomplete interval-valued information systems based on alpha-weak similarity," *Knowl. Based Syst.*, vol. 136, pp. 159-171, 2017.
- [7] Y. H. Qian, J. Y. Liang, and C. Y. Dang, "Interval ordered information systems," *Comput. & Math Appl.*, vol. 56, no. 8, pp. 1994-2009, 2008.
- [8] J. H. Yu, M. H. Chen, and W. H. Xu, "Dynamic computing rough approximations approach to time-evolving information granule interval-valued ordered information system," *Appl. Soft Comput.*, vol. 60, pp. 18-29, 2017.
- [9] J. H. Yu, and W. H. Xu, "Incremental computing approximations with the dynamic object set in interval-valued ordered information system," *Fundam. Inform.*, vol. 142, no. 1/4, pp. 373-397, 2015.
- [10] B. B. Sang, H. M. Chen, L. Yang, T. R. Li, W. H. Xu, and C. Luo, "Feature selection for dynamic interval-valued ordered data based on fuzzy dominance neighborhood rough set," *Knowl. Based Syst.*, vol. 227, 107223, 2021.
- [11] J. H. Dai, G. J. Zheng, H. F. Han, Q. H. Hu, N. G. Zheng, J. Liu, and Q. L. Zhang, "Probability approach for interval-valued ordered decision systems in dominance-based fuzzy rough set theory," *J. Intell. Fuzzy Syst.*, vol. 32, no. 12, pp. 703-710, 2017.
- [12] Y. Liu, "Multi-source heterogeneous data fusion based on perceptual semantics in narrow-band internet of things," *Pers. Ubiquitous Comput.*, vol. 23 no.3 - 4, pp. 413-420, 2019.
- [13] M. M. Li, X. Y. Zhang, "Information fusion in a multi-source incomplete information system based on information entropy," *Entropy*, vol.19, no. 11, 10.3390, 2017.
- [14] H. Aliakbarpour, V.S. Prasath, K. Palaniappan, G. Seetharaman, and J. Dias, "Heterogeneous multi-view information fusion: Review of 3-D reconstruction methods and a new registration with uncertainty modeling," *IEEE Access* vol.4, pp. 8264 - 8285, 2016.
- [15] Z. Pawlak, "Rough sets," *Int. J. Comput. & Inf. Sci.*, vol. 11, no. 5, pp. 341-365, 1982.
- [16] Y. L. Zhang, S. H. Yang, and G. Y. Wang, "Measuring uncertainty of probabilistic rough set model from its three regions," *IEEE Trans. Syst. Man Cybern. Syst.*, vol. 47, no. 12, pp. 3299-3309, 2017.
- [17] F. Tufail, M. Shabir, and ESA. Abo-Tabl, "A comparison of promethee and topsis techniques based on bipolar soft covering-based rough sets," *IEEE Access*, vol. 10, pp. 37586-37602, 2022.
- [18] C. Z. Wang, Y. Huang, M.W. Shao, Q.H. Hu, and D.G. Chen, "Feature selection based on neighborhood self-information," *IEEE Trans. on Cybern.*, vol. 50, no. 9, pp. 4031-4042, 2020.
- [19] Y. Cheng, "Forward approximation and backward approximation in fuzzy rough sets," *Neurocomputing*, vol. 148, pp. 340-353, 2014.
- [20] J. C. R. Alcantud, F. Feng, and R. R. Yager, "An N-Soft Set Approach to Rough Sets", *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 11, pp. 2996-3007, 2020.
- [21] A. Ali, M. I. Ali, and N. Rehman, "Soft dominance based rough sets with applications in information systems," *Int. J. Approx. Reason.*, vol. 113, pp. 171-195, 2019.
- [22] T. Shaheen, B. Mian, M. Shabir, and F. Feng, "A Novel Approach to Decision Analysis Using Dominance-Based Soft Rough Sets," *Int. J. Fuzzy Syst.*, vol. 21, no. 3, pp. 954-962, 2019.
- [23] X. Y. Che, J.S. Mi, and D.G. Chen, "Information fusion and numerical characterization of a multi-source information system," *Knowl. Based Syst.*, vol. 145, pp. 121-133, 2018.
- [24] I. Saadi, B. Farooq, A. Mustafa, J. Teller, and M. Cools, "An efficient hierarchical model for multi-source information fusion," *Expert Syst. Appl.*, vol. 110, pp. 352-362, 2018.
- [25] L. Yang, W. H. Xu, X. Y. Zhang, and B. B. Sang, "Multi-granulation method for information fusion in multi-source decision information system," *Int. J. Approx. Reason.*, vol. 122, pp. 47-65, 2020.
- [26] W. Wei, and J. Y. Liang, "Information fusion in rough set theory : An overview," *Inform. Fusion*, vol. 48, pp.107-118, 2019.
- [27] S. Greco, B. Matarazzo, and R. Slowinski, "Rough approximation of a preference relation by dominance relations," *Cent. Eur. J. Oper. Res.*, vol. 117, no. 1, pp. 63-83, 1999.
- [28] L. A. Zadeh, "Fuzzy sets," *Inform. Con.*, vol. 8, no. 3, pp. 338-353, 1965.
- [29] Q. H. Hu, D. R. Yu, and M. Z. Guo, "Fuzzy preference based rough sets," *Inform. Sci.*, vol. 180, no. 10, pp. 2003-2022, 2010.
- [30] C. E. Shannon and W. Weaver, "The mathematical theory of communication," *The Bell Syst. Tech. J.*, vol. 27, no. 3/4, pp. 373-423, 1948.
- [31] V. Srishti, and S. Seba, "Sentiment cognition from words shortlisted by fuzzy entropy," *IEEE Trans. Cogn. Dev. Syst.*, vol. 12, no. 3, pp. 541-550, 2020.
- [32] X. Hu, H. Zhang, C. M. Yang, X. J. Zhao, and B. Li, "Regularized spectral clustering with entropy perturbation," *IEEE Trans. Big Data*, vol. 7, no. 6, pp. 967-972, 2021.
- [33] Q. H. Hu, M. Z. Guo, D. R. Yu, and J. F. Liu, "Information entropy for ordinal classification," *Sci. China Inf. Sci.*, vol. 53, no. 6, pp. 1188-1200, 2010.
- [34] W. H. Xu, M. M. Li, and X. Z. W, "Information fusion based on information entropy in fuzzy multi-source incomplete information system," *Int. J. Fuzzy Syst.*, vol. 19, pp. 1200-1216, 2017.
- [35] W. B. Qian, S. D. Yu, J. Yang, Y. L. Wang, and J. H. Zhang, "Multi-label feature selection based on information entropy fusion in multi-source decision system," *Evol. Intelli*, vol. 13, no. 2, pp. 255-268, 2020.

[36] Q. C. Zhang, L. T. Yang, Z. K. Chen, and P. Li, "Incremental deep computation model for wireless big data feature learning," *IEEE Trans. Big Data*, vol. 6, no. 2, pp. 248-257, 2020.

[37] X. K. Wang, L. T. Yang, X. Y. Chen, L. Z. Wang, R. Ranjan, X. D. Chen, and M.J. Deen, "A multi-order distributed HOSVD with its incremental computing for big services in cyber-physical-social systems," *IEEE Trans. Big Data*, vol. 6, no. 4, pp. 666-678, 2020.

[38] P. F. Zhang, T. R. Li, G. Q. Wang, C. Luo, H. M. Chen, J. B. Zhang, D. X. Wang, Z. Yu, "Multi-source information fusion based on rough set theory: A review," *Inform. Fusion*, vol. 68, pp. 85-117, 2021.

[39] J. Xu, C. Xu, B. Zou, Y. Y. Tang, J. T. Peng, and X. G. You, "New incremental learning algorithm with support vector machines," *IEEE Trans. Syst. Man Cybern. Syst.*, vol. 49, no. 11, pp. 2230-2241, 2019.

[40] Y. Y. Zhang, T. R. Li, C. Luo, J. B. Zhang, and H. M. Chen, "Incremental updating of rough approximations in interval-valued information systems under attribute generalization," *Inform. Sci.*, vol.373, pp. 461-475, 2016.

[41] J. H. Yu, and W. H. Xu, "Incremental computing approximations with the dynamic object set in interval-valued ordered information system," *Fund. Inform.*, vol. 142, no. 1/4, pp. 373-397, 2015.

[42] W. H. Xu, M. M. Li, and X. Z. W, "Information fusion based on information entropy in fuzzy multi-source incomplete information system," *Int. J. Fuzzy Syst.*, vol.19, pp. 1200-1216, 2017.

[43] W. H. Xu, and J. H. Yu, "A novel approach to information fusion in multi-source datasets: A granular computing viewpoint," *Inform. Sci.*, vol. 378, pp. 410-423, 2017.

[44] Q. L. Li, L. Lu, Z. Li, W. Wei, Z. Liu, G. Jeon, and X. M. Yang, "Coupled GAN with relativistic discriminators for infrared and visible images fusion," *IEEE Sens. J.*, vol. 21, no. 6, pp. 7458-7467, 2021.

[45] Y. Y. Huang, T. R. Li, C. Luo, H. Fujita and S. Horng, "Dynamic Fusion of Multisource Interval-Valued Data by Fuzzy Granulation," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 6, pp. 3403-3417, 2018.

[46] Y. G. Zhu, D. Y. Liu, Y. Li, and X. H. Wang, "Selective and Incremental Fusion for Fuzzy and Uncertain Data Based on Probabilistic Graphical Model," *J. Intell. Fuzzy Syst.*, vol. 29, no. 6, pp. 2397-2403, 2015.

[47] L. Wang, and H. Wang, "An integrated qualitative group decision-making method for assessing health-care waste treatment technologies based on linguistic terms with weakened hedges," *Appl. Soft Comput.*, vol. 117, 108435, 2022.

[48] Z. Pawlak, "Rough Sets: Theoretical Aspects of Reasoning About Data," Norwell, MA, USA: Kluwer, 1991.

[49] Z. Pawlak, "A. Skowron, Rudiments of rough sets," *Inform. Sci.*, vol. 177, no. 1, pp. 3-27, 2007.

[50] S. Greco, B. Matarazzo, and R. Slowinski, "Rough sets theory for multicriteria decision analysis," *Cent. Eur. J. Oper. Res.*, vol. 129, no. 1, pp. 1-47, 2001.

[51] J. H. Dai, W. T. Wang, and J. S. Mi, "Uncertainty measurement for interval-valued information systems," *Inform. Sci.*, vol. 251, pp. 63-78, 2013.

[52] J. H. Li, W. Y. Zeng, J. J. Xie, and Q. Yin, "A new fuzzy regression model based on least absolute deviation," *Eng. Appl. Artif. Intell.*, vol. 52, pp. 54-64, 2016.



**Weihua Xu** received the Ph.D. degree from School of Sciences, Xi'an Jiaotong University, Xi'an, China, in 2007, and the M.Sc. degree from School of Mathematics and Information Sciences, Guangxi University, Nanning, China, in 2004. He is currently a professor with the College of Artificial Intelligence, Southwest University, Chongqing, China. He serves in the editorial boards of several international journals, and has published 3 monographs and over 120 articles in international journals. His current research interests include granular computing, approximate reasoning, fuzzy sets, rough sets, concept lattices, and cognitive computing.



**Yanzhou Pan** received the B.Sc. degree from the School of Finance, Southwestern University of Finance and Economics, Sichuan, China, in 2021. She is currently pursuing the M.Sc. degree from the school of artificial intelligence, Southwest University, Chongqing, China. Her current research interests include granular computing and knowledge discovery.



**Xiuwei Chen** received the B.Sc. degree from the School of Statistics and Mathematics, Nanjing Audit University, Nanjing, China, in 2020. He is currently pursuing the M.Sc. degree from the school of artificial intelligence, Southwest University, Chongqing, China. His current research interests include information fusion, attribute reduction and granular computing.



**Weiping Ding** is currently a Full Professor with the School of Information Science and Technology, Nantong University, Nantong, China. He received the Ph.D. degree in Computation Application, Nanjing University of Aeronautics and Astronautics (NUAA), Nanjing, China, in 2013. He was a Visiting Scholar at University of Lethbridge (UL), Alberta, Canada, in 2011. From 2014 to 2015, He is a Postdoctoral Researcher at the Brain Research Center, National Chiao Tung University (NCTU), Hsinchu, Taiwan. In 2016, He was a Visiting Scholar at National University of Singapore (NUS), Singapore. From 2017 to 2018, he was a Visiting Professor at University of Technology Sydney (UTS), Ultimo, NSW, Australia. He has published more than 80 research peer-reviewed journal and conference papers, including IEEE T-FS, T-NNLS, T-CYB, T-SMCS, TBME, T-II, T-ETCI and T-ITS, etc. He has three ESI highly cited papers. Dr. Ding currently serves on the Editorial Advisory Board of Knowledge-Based Systems and Editorial Board of Information Fusion, Applied Soft Computing. He serves as an Associate Editor of IEEE Transactions on Fuzzy Systems, Information Sciences, Swarm and Evolutionary Computation, IEEE Access and Journal of Intelligent & Fuzzy Systems, and Co-Editor-in-Chief of Journal of Artificial Intelligence and System. His main research directions involve data mining, granular computing, evolutionary computing, machine learning and big data analytics.



**Yuhua Qian** received the M.S. and Ph.D. degrees in computers with applications from Shanxi University, Taiyuan, China, in 2005 and 2011, respectively. He is currently a Professor with the Key Laboratory of Computational Intelligence and Chinese Information Processing, Ministry of Education, Shanxi University. He is best known for multigranulation rough sets in learning from categorical data and granular computing. He is involved in research on machine learning, pattern recognition, feature selection, granular computing, and artificial intelligence.

He has authored over 100 articles on these topics in international journals. He served on the Editorial Board of the International Journal of Knowledge-Based Organizations and Artificial Intelligence Research. He has served as the Program Chair or Special Issue Chair of the Conference on Rough Sets and Knowledge Technology, the Joint Rough Set Symposium, and the Conference on Industrial Instrumentation and Control. and a PC Member of many machine learning, data mining conferences.